



Top View

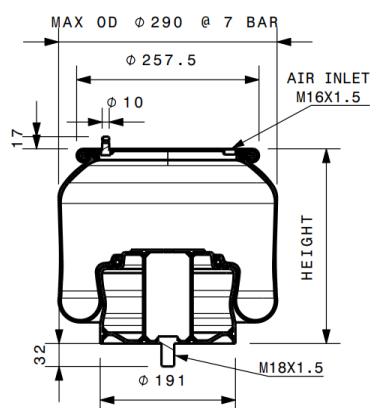

Section View



Bottom View

Technical Data

Part Description: Crimped reversible sleeve complete assembly

Bellow Height: 365mm

Minimum Recommended Height: 200mm

Design Height: 300mm

Maximum Recommended Height: 400mm

Working Stroke: 200mm

Loading Capacity @ 1 BAR @ 300mm (±5%): 2.4kN

Loading Capacity @ 7 BAR @ 300mm (±5%): 28.6kN


Max OD @ 7 BAR : Ø290mm

Required Space: 320mm

Weight (±0.2kg) : 7.0kg

Force (kN)

Air Pressure Height (mm)	1 bar	2 bar	3 bar	4 bar	5 bar	6 bar	7 bar	8 bar
400	2.60	5.55	8.25	11.10	14.10	17.20	20.60	24.30
380	2.45	6.15	9.45	12.90	16.35	19.90	23.80	27.75
360	2.40	6.30	10.35	14.25	18.10	22.20	26.50	31.00
340	2.40	6.40	10.50	14.85	19.20	23.70	28.30	33.00
320	2.45	6.30	10.40	14.90	19.35	24.10	28.80	34.05
300	2.40	6.15	10.25	14.70	19.05	23.85	28.60	33.80
280	2.40	6.10	10.15	14.35	18.75	23.40	28.20	33.15
260	2.45	6.15	10.20	14.25	18.65	22.90	27.70	32.60
240	2.60	6.40	10.35	14.50	18.75	23.10	27.70	32.60
220	2.70	6.65	10.70	15.00	19.20	23.65	28.40	33.30
200	2.90	6.90	10.90	15.70	19.75	24.45	29.30	34.15

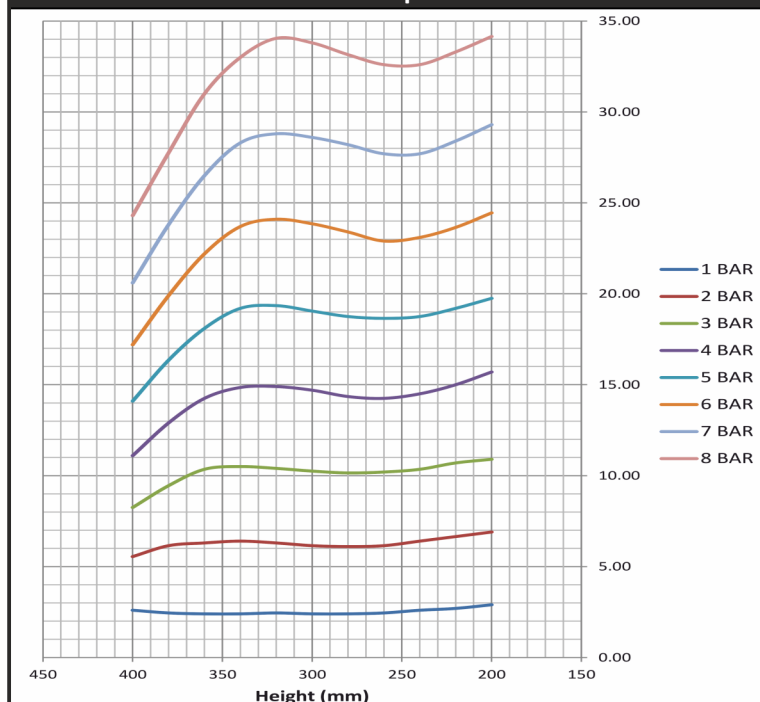Graph**CROSS REFERENCE**

Gibraltar	Firestone	Goodyear	Volvo	Contitech
G2139133	NA	1R12-826	21513836	1 DF 25C-1 NP (Phoenix)