



Technical Data	
Part Description: Snap fitted rolling lobe type complete assembly	
Bellow Height: 400mm	
Minimum Recommended Height: 240mm	
Design Height: 295mm	
Maximum Recommended Height: 420mm	
Working Stroke: 180mm	
Loading Capacity @ 1 BAR @ 295mm (±5%): 2.5kN	
Loading Capacity @ 7 BAR @ 295mm (±5%): 26.7kN	
Maximum OD @ 7 BAR : Ø300mm	
Required Space: 325mm	
Weight (±0.2kg) : 8.0kg	





Top View

Force (kN)								
Air Pressure Height (mm)	1 bar	2 bar	3 bar	4 bar	5 bar	6 bar	7 bar	8 bar
420	2.75	5.55	8.25	11.25	14.45	17.55	21.00	24.80
400	2.85	6.15	9.35	12.65	16.00	19.70	23.50	27.55
380	2.80	6.50	10.05	13.65	17.40	21.35	25.50	29.80
360	2.70	6.80	10.75	14.55	18.70	22.95	27.40	31.85
340	2.55	6.65	10.75	15.10	19.45	23.90	28.60	33.60
320	2.50	6.20	10.65	15.25	19.85	24.30	29.10	34.10
300	2.55	6.20	10.25	14.70	19.10	23.95	28.70	33.65
280	2.45	6.00	9.95	14.20	18.50	23.00	27.65	32.55
260	2.75	6.30	10.05	14.25	18.30	22.70	27.10	32.00
240	2.55	6.40	10.35	15.25	18.75	22.95	27.50	32.20

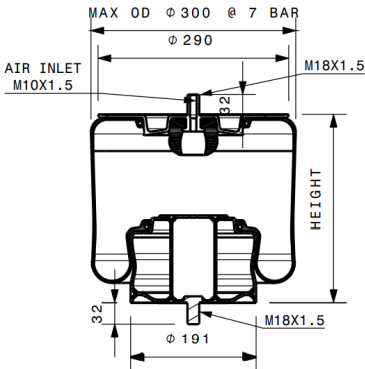

Section View

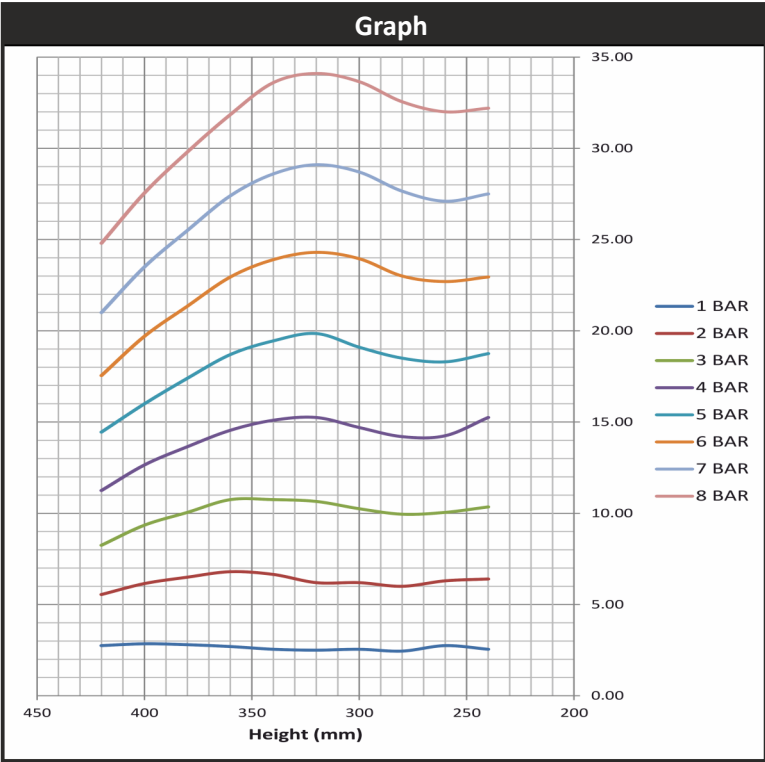

Bottom View

CROSS REFERENCE				
Gibraltar	Firestone	Contitech	Volvo	Leyland/ Wheels India
G7039005	NA	NA	70377054	NA